

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number
WO 03/082471 A1(51) International Patent Classification⁷: B02C 7/14,
D21B 1/14, D21D 1/30

(21) International Application Number: PCT/SE03/00531

(22) International Filing Date: 2 April 2003 (02.04.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0201023-9 2 April 2002 (02.04.2002) SE(71) Applicant (for all designated States except US): METSO
PAPER, INC. [FI/FI]; P. O. Box 1220, FIN-00101 Helsinki
(FI).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and


(75) Inventor/Applicant (for US only): BACKLUND, Hans-
Olof [SE/SE]; Viljansvägen 25, S-860 25 Kovland (SE).(74) Agent: GROTH & CO. KB; Box 6107, S-102 32 Stock-
holm (SE).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND A DEVICE FOR MEASURING STRESS FORCES IN REFINERS

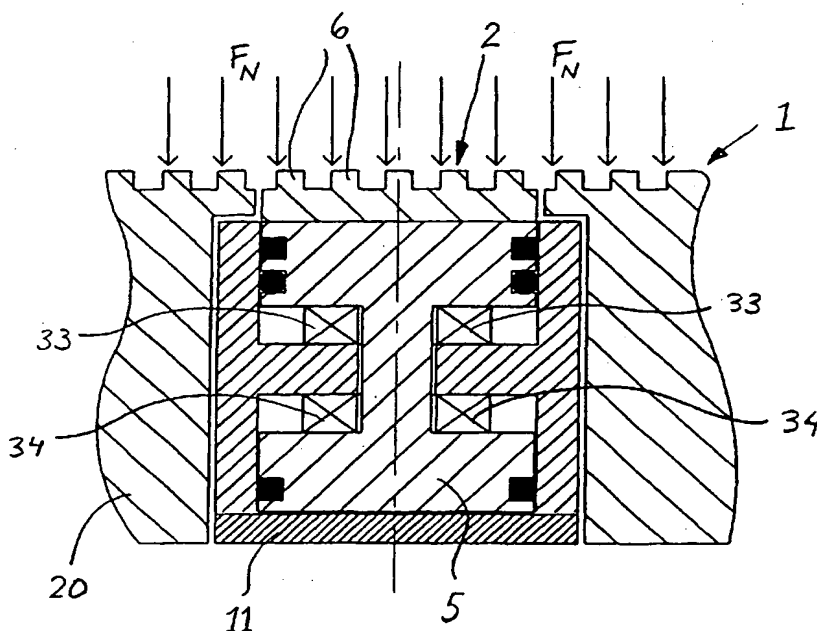

(57) Abstract: The invention relates to a method for measuring stress forces in refiners having refining discs that between them define a refining gap for refining material between bars (3) arranged on the refining discs. The measuring is performed over a measuring surface (2) that constitutes a part of a refining disc, said measuring surface comprising at least parts of more than one bar (3) and being resiliently arranged in the surface of the refining disc. Furthermore, forces in a plane at right angles to the measuring surface are measured. The invention also relates to a device for performing said method.